


MACH 10

REF. AC45303-8665

ROOFTOP AIR CONDITIONER
3950 WATTS COOLING CAPACITY
1600 WATTS ELECTRICAL HEATING

- REPLACES BOTH THE MACH 3 Plus AND THE ROUGHNECK
- REDUCED HEIGHT AND WEIGHT
- MECHANICAL CONTROLS FOR RELIABILITY AND DURABILITY

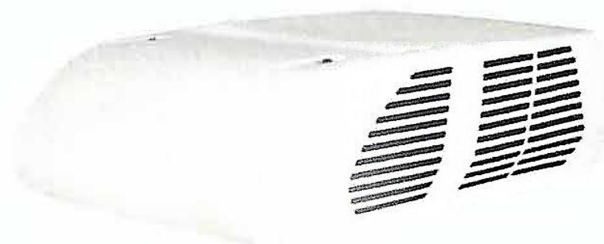

Cooling Capacity		3,95 kW (13500 BTU/h)
Heating		1,60 kW (5500 BTU/h)
Power Supply		220-240 V, 50 Hz, 1 phase
Breaker		10 A
Start-up Amps		24 A (up to) / 0,15 s.
Amps Cooling	at 35°C and 50% humidity	5,5 A
Amps Cooling	at 48°C and 30% humidity	6,5 A
Amps Heating		7,4 A
Running Watts Cooling	at 35°C and 50% humidity	1270 W
Running Watts Cooling	at 48°C and 30% humidity	1495 W
Running Amps Heating		1700 W
Refrigerant		R 410A
Fan Speeds		2
Maximum Air Flow		470 m3/h
Dimensions	Roof Unit	L 97 x l 67 x H 30 cm
Dimensions	Ceiling Assembly	L 56 x l 54 x H 5 cm
Roof opening		36 x 36 cm
Roof Thickness		up to 15 cm
Weight	Roof Unit	38 Kg
Weight	C/A and heater	4,- Kg

This diagram shows the exploded view of the HP DesignJet 500C printer chassis. The dimensions are as follows:

- Overall width: 965.2 [38.0]
- Overall height: 299.7 [11.8]
- Front panel width: 665.5 [26.2]
- Front panel height: 147.3 [5.8]
- Internal width (left): 368.3 [14.5]
- Internal width (right): 368.3 [14.5]
- Internal height (left): 477.5 [18.8]

Technical drawing of a rooftop unit shroud showing dimensions and components. The drawing includes the following labels and dimensions:

- 947X SERIES FREE DELIVERY CEILING ASSEMBLY SHROUD** (indicated by a line pointing to the top edge)
- 965** (overall width dimension)
- [38.0]** (overall width dimension in inches)
- 126.9** (dimension from left edge to center of roof opening)
- [5.0]** (dimension from left edge to center of roof opening in inches)
- 104.1** (dimension from left edge to center of roof opening)
- [4.1]** (dimension from left edge to center of roof opening in inches)
- 665.5** (overall height dimension)
- [26.2]** (overall height dimension in inches)
- 355.6 x 355.6** (roof opening dimensions)
- [14 x 14]** (roof opening dimensions in inches)
- ROOF OPENING** (indicated by a line pointing to the dashed rectangle)
- FRONT** (indicated by an arrow pointing to the front face)
- 533.4** (dimension from bottom edge to center of roof opening)
- [21.0]** (dimension from bottom edge to center of roof opening in inches)
- 154.9** (dimension from bottom edge to center of roof opening)
- [6.1]** (dimension from bottom edge to center of roof opening in inches)
- 88.9** (dimension from bottom edge to center of roof opening)
- [3.5]** (dimension from bottom edge to center of roof opening in inches)
- 561.3** (dimension from left edge to center of roof opening)
- [22.1]** (dimension from left edge to center of roof opening in inches)
- 453XX SERIES ROOFTOP UNIT SHROUD** (indicated by a line pointing to the bottom edge)

DIMENSIONS (mm/inches)		
Exterior Shroud	Height	300 / 11.8
	Width	665 / 26.2
	Length	965 / 38.0
Interior Shroud	Depth	56 / 2.2
	Width	533 / 21.0
	Length	562 / 22.1