WIPER CONTROL | W50


Installation Instructions

Before installation please read these instructions.



- 1 to 3 motors
- Synchronized sweep
- Interval
- Slow speed
- Fast speed
- Washer output


140120

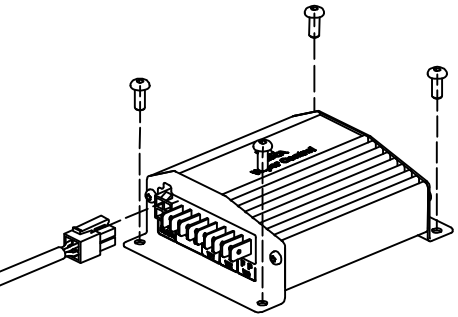

Installation

(Keep the battery main switch off during installation).

1. Place the control unit to desired position.
2. Insert the screws into holes and tighten.
3. Connect the cable from switch.
4. Connect the remaining cables according to diagram below.
5. Turn on main switch and test all functions.
6. To have all motors syncronized, run the wipers in slow speed for about 5 minutes.

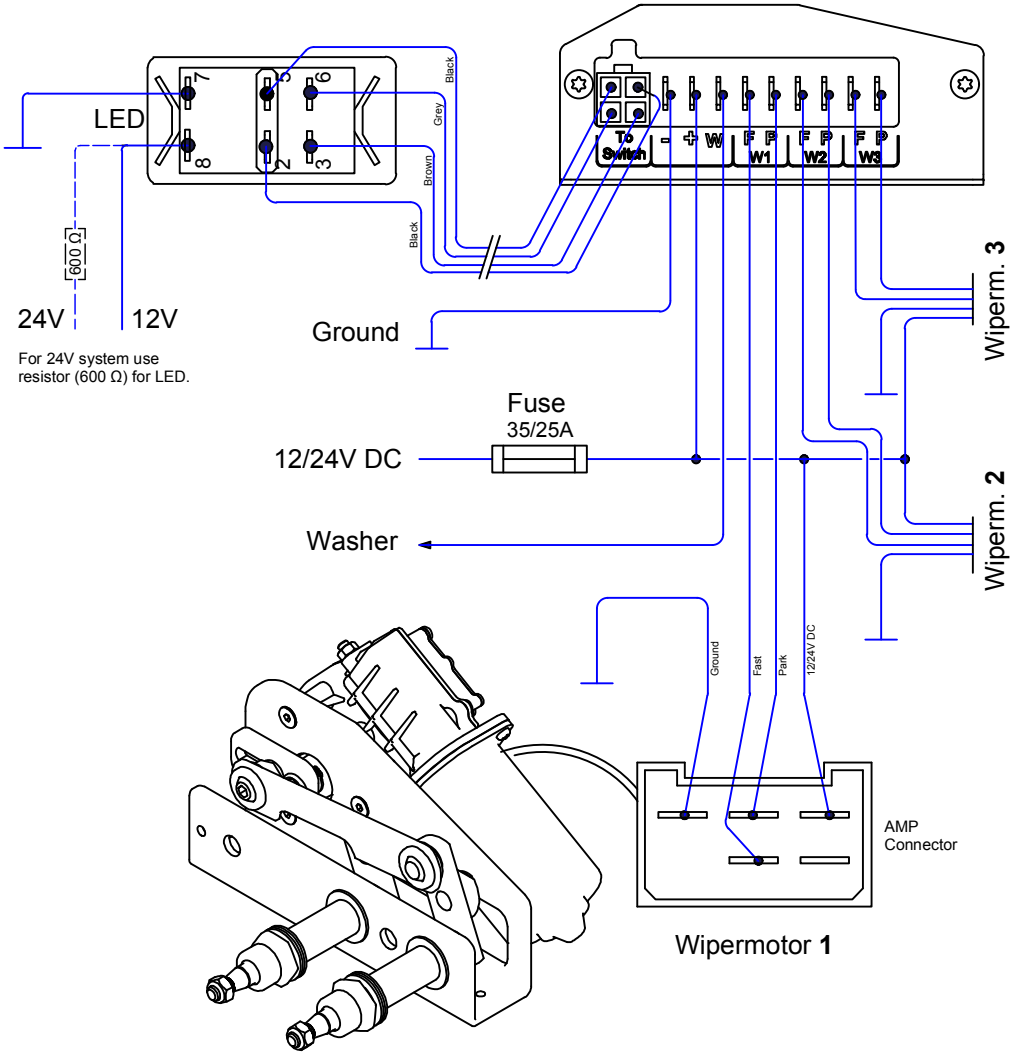


Function for switch

-One push to the on position will start 3 motors in synchronized interval.
-One more push to momentary will run 3 motors slow speed synchronized.
-One more push will run 3 motors fast speed synchronized.
-One more push starts from interval and so on.


-One long push from off to momentary will start 1 motor in interval (wiper 1).
-One more push will run 1 motor slow speed.
-One more push will run 1 motor fast speed.
-One more push starts 1 motor from interval and so on.

Washer:
When running, push switch to momentary more than one second and washer will start.


If the wiper motors gets overloaded the power automatically breaks.
Push switch to off , then to on and motor will start again.

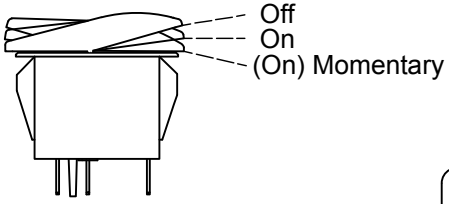

Switch 466223
Actuator 466026

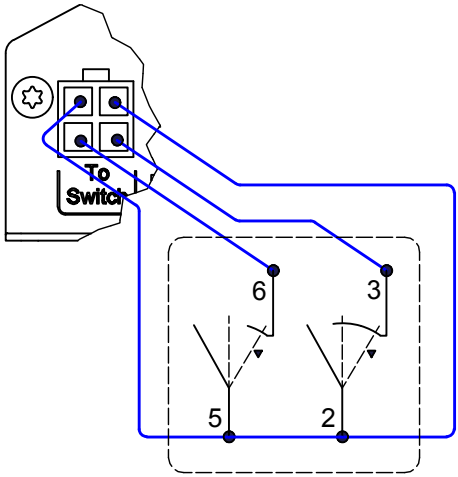

Switch circiut
Off - 2&3 - (2&3,5&6)

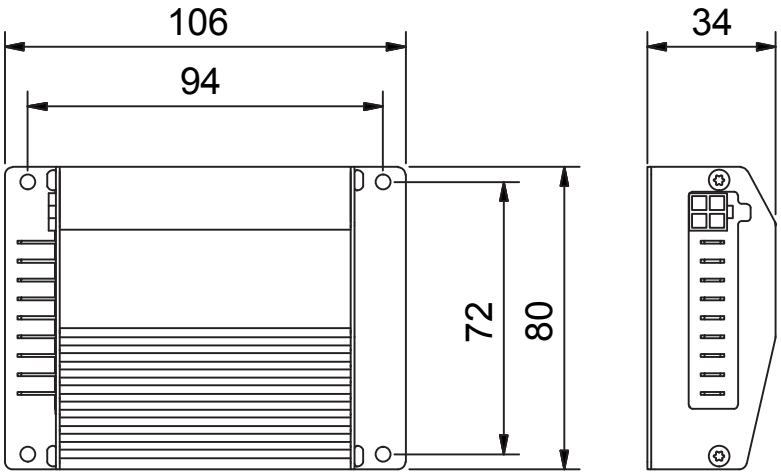

Item no.	Voltage
532063	12/24 V

Limited warranty

» Roca warrants the wiper control to be free from defective material and workmanship for a period of 3 years from the date of purchase.
» This warranty does not apply to failure or damage caused by improper installation, misuse, lightning strike or damage from a power surge.
» If failure occurs during this period, return it to your dealer for repair or replacement.

Fits wiper motor:



W50

Item no.	Volt (V)	L1 (mm)	L2 (mm)
531013	12	28	78
531014	24	28	78
531023	12	53	103
531024	24	53	103
531033	12	78	128
531034	24	78	128